

10/31/00



HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P. O. Box 272400
Fort Collins, Colorado 80527-2400

11-02-00

PATENT APPLICATION

ATTORNEY DOCKET NO. 10002571-1

A

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

jc925 U.S. PTO
09/703388
10/31/00

COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility ☐ Design
☒ original patent application,
☐ continuation-in-part application

INVENTOR(S): Douglas W. Arens

TITLE: Friend Configuration And Method For Network Devices

Enclosed are:

- ☒ The Declaration and Power of Attorney. ☐ signed ☒ unsigned or partially signed
☒ 5 sheets of drawings (one set) ☐ Associate Power of Attorney
☐ Form PTO-1449 ☐ Information Disclosure Statement and Form PTO-1449
☐ Priority document(s) ☐ (Other) (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	25 — 20	5	X \$18	\$ 90
INDEPENDENT CLAIMS	4 — 3	1	X \$80	\$ 80
ANY MULTIPLE DEPENDENT CLAIMS	0		\$270	\$ 0
BASIC FEE: Design (\$320.00); Utility (\$710.00)				\$ 710
TOTAL FILING FEE				\$ 880
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 880

Charge \$ 880 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL442083894US

Date of Deposit October 31, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Commissioner for Patents, Washington, D.C. 20231.

By

Typed Name: Lyza Finuliar

Respectfully submitted,

Douglas W. Arens

By

Denise A. Lee

Denise A. Lee

Attorney/Agent for Applicant(s)

Reg. No. 35,931

Date: Oct. 31, 2000

Telephone No.: (408) 447-6153

FRIEND CONFIGURATION AND METHOD FOR NETWORK DEVICES

BACKGROUND OF THE INVENTION

The present invention is related to interconnected networks and pertains particularly to automated internet protocol (IP) address allocation and assignment for the internet protocol.

The Transport Control/Internet Protocol (TCP/IP) has entered the main stream as the protocol of choice for network connectivity. TCP/IP commonly referred to as IP, has a number of benefits which attract networks and users including standardization, rich protocol and application support and the ability to route over Wide Area Networks (WANs). There are a variety of ways to configure and set up an IP protocol stack. IP is flexible in that the protocol stack may be configured manually on the host, or automatically which minimizes the level of interaction by the network administrator.

Although IP has many benefits, because the protocol stack often needs to be manually configured, IP can be difficult to configure and administer. This is especially the case in environments where a network novice may be present. The steps required to setup and configure an IP host are not intuitive. A TCP/IP knowledgeable person is required to provide the basic configuration information. A person familiar with TCP/IP but not familiar with the network cannot properly configure IP since the currently available set of addresses, a subnet mask and default gateway are required. Implementation difficulties are further exacerbated by the fact that errors occurring during IP installation can cause severe network problems and can be difficult to solve.

For basic IP configuration, an IP address is selected and configured on the host entity. Selection of an IP address requires that the user know a unique address which corresponds to the network where the host entity is to operate. IP addresses are sometimes managed by a system administrator in order to guarantee uniqueness. Also, an IP subnet mask must be selected and configured on each host entity. Selection of the IP subnet mask is required so that it can be determined when an address in the host's protocol stack is meant for the local subnet and when an address should be passed to the default gateway. Optionally, IP configuration may include the selection and configuration of a default gateway on the host entity. In order to allow communication across multiple networks, the default gateway must be configured.

One method of defining IP configuration information is through the usage of a BOOTstrap Protocol (BOOTP). BOOTP allows clients to automatically receive all IP configuration information from a configured BOOTP server. This frees the user from having to configure individual entities but the BOOTP server itself needs to be configured.

Because the BOOTP server configuration requires assignment of unique IP addresses by the system administrator, it is administratively expensive and more prone to error than more automatic configuration methodologies. When a client sends unique MAC (Media Access Controller) address to the BOOTP server, the BOOTP server sends the client a IP address.

Another method of defining IP configuration information is through the usage of a Dynamic Host Configuration Protocol (DHCP). DHCP provides a framework for passing configuration information to hosts on a TCP/IP network. DHCP is based on BOOTP, but goes beyond it by adding the capability of automatic allocation of reusable addresses and configuration options. Like BOOTP, the configuration for individual entities must be configured on the DHCP server. DHCP reuses IP addresses but does not address the issue of friendly names associated with initiated addresses and how their associations may change.

One of the problems associated with both BOOTP and DHCP is the requirement of a BOOTP or DHCP server for assignment of IP addresses. A third protocol, AutoIP allows devices to claim IP addresses in the absence of a DHCP server or similar IP configuration authority. IP addresses are assigned from a reserved range of addresses that are only good for the local network. An unconfigured device will claim an address in the reserved range of addresses by randomly generating an address in the reserved range and then making an ARP request to see if the address has already been claimed by another device. AutoIP continually check for the presence of a DHCP server. If a DHCP server comes online, the previously configured AutoIP devices will attempt to switch their IP addresses to one provided by the DHCP server.

A network configuration and method is needed for transferring and/or assigning IP address and network information to devices that are connected to a network (which may or may not include a server) which works with current protocols, minimizes user and system administrator interaction, and minimizes the need for specialized software services.

SUMMARY OF THE INVENTION

The present invention provides a network configuration and method for transferring and/or assigning IP address and network information to devices that are connected to a network (which may or may not include a server, hub, router, or switch) which minimizes (1) interaction by the user or system administrator and (2) the need for specialized software services. The network includes at least one unconfigured “friend” device and one configured “friend” device.

In one embodiment, the unconfigured device sends out a request for configuration information to the other devices on the network. A configured device on the network responds to the request with at least a portion of its own IP configuration information. The at least a portion of the IP configuration information of the configured device is then modified to create IP configuration information for the unconfigured device. This modified information is then used to configure the previously unconfigured, device. In an alternative embodiment, the configured device periodically broadcasts at least a portion of its configuration information on the network without having received a request for information from an unconfigured device. Again, the at least a portion of the IP configuration information of the configured device is then modified to create IP configuration information for the unconfigured device.

The described network configuration and methodology is different from other methodologies where the IP address for the unconfigured device is merely assigned by other configured devices. Instead, in the present invention, a

configured device sends back information to the unconfigured device about the network environment. The unconfigured device uses this information about the network environment to create its own IP address.

Because the method and configuration of the described invention leverages information available from other configured network devices, the IP address for the first device is consistent with IP addresses already defined on the network. Devices using the “friend” configuration or protocol may be designed to interoperate and cooperate by automatically sharing basic information. For example, in one embodiment SYSLOG information may be passed from a second configured device to a first device. The other network information, in this case SYSLOG information, may be passed to the first device with the requested IP configuration information. Alternatively, the other network information may be passed to the first device after it has been configured in a separate request for information.

The described configuration and method does not depend on all of the devices in the network being capable of understanding, being aware of or responding to a request for information from the first device. Further, the “friend” configuration and method does not require extra equipment to implement. For example, no server is needed to implement the friend configuration or method. This is important for home computer systems or networks where low cost is critical. Further, no extra software services need be installed on servers or other network infrastructure.

The friend configuration and methodology described by the present invention is designed to automate and simplify the installation of new or unconfigured devices on the network. The ease of installation of new network devices on a network is a valuable feature to customers. Because the methodology is automatic and thus requires minimal user interaction, system errors are reduced, installation time is reduced, and system costs are reduced since the need for highly trained system administrators is reduced.

A further understanding of the nature and advantages of the present invention may be realized with reference to the remaining portions of the specification and the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a simplified block diagram of a network configuration according to the present invention.

Figure 2A shows a flowchart of one method of transferring network information from a configured device in the network to an unconfigured device in the same network according to the present invention.

Figure 2B shows a flowchart of an alternative method of transferring network information from a configured device in the network to an unconfigured device in the same network according to the present invention.

Figure 3 shows an example of network information that is broadcast from a configured device on a TCP/IP network broadcast over a network to an unconfigured device.

Figure 4 shows a flowchart of the steps of using at least a portion of the IP configuration information of the second device to create IP configuration information for the first device for one embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention provides a network configuration and method for transferring and/or assigning IP address and network information to devices that are connected to a network, which may or may not include a server. Referring to Figure 1 shows a network configuration 100 according to the present invention. The network 100 includes a first device 110, a second device 120, and a local console 132 that are connected by a local network 130. The local network 130 is, for example, one or a combination of local area networks. The local console 132, first device 110 and second device 120 are shown connected to, and may be considered part of the local network 140. The local network 130 is, for example, connected to the Internet 150 through a gateway 160. A dotted line 170 is representative of the subnet boundary for the network.

The network configuration shown in Figure 1 is only representative. A network may consist of as few two devices connected to each other, or thousands of devices connected on an intracompany network, to hundreds of millions of

devices connected on a network via the Internet. Thus, Figure 1 is just illustrative of the number of connections and levels of connections that could be made according to the network configuration of the present invention. Such network connections and protocols are well known. The network could be, for example, could be connected in an Ethernet or token ring network.

In one embodiment the network configuration includes a first device that is unconfigured and connected to the network; and a second device that is configured and connected to the network, wherein the second device sends over the network at least a portion of its own configuration information, wherein the at least a portion of the configuration information of the second device is used to create configuration information for the first device. In the described embodiment information is typically periodically broadcast by the configured second device. Although the range of the network broadcast may vary, typically the configuration information if the second device broadcast to devices on the same subnet.

In an alternative network configuration, the network includes a first device 110 that is unconfigured and connected to the network, the first device 110 being capable of sending over the network a request for IP configuration information; and a second device 120 that is configured for the network and connected to the network, wherein responsive to the request for IP configuration information from the first device, the second device responds with at least a portion of its IP configuration information, wherein the at least a portion of the IP configuration of the second device is used to create IP configuration information for the first device. Although the range of the network broadcast may vary, typically the

request of the first device for IP configuration information and the response by the second device is broadcast on the network to devices on the same subnet.

Both the first and second device may be a variety of devices, including but in no means limited to a router, hub, switch, server, printer, PC, workstation, scanner, or storage device. Both the first device and the second device are “friends”. A “friend” device has the ability to broadcast its configuration information over the network and the ability to create from the configuration information of another configured device on the network, its own configuration information. In an alternative embodiment, a “friend” device would also have the capability to send out a request on the network for configuration information and the ability to respond to a request from another friend device for configuration information. Typically, the “friend” capabilities of sending and receiving network information and performing the required modifications according to the friend protocol are implemented in computer software or alternatively in firmware stored on the device.

Figure 2A shows a flowchart of one method of transferring network information from a configured device in the network to an unconfigured device in the same network according to the present invention. Referring to Figure 2A, the method includes the steps of: sending from the second device that is connected to and configured for the network at least a portion of its configuration information; and using the at least a portion of the configuration information sent from the second device to create configuration information for the first device, wherein the first device is connected to the network and initially unconfigured.

Figure 2B shows an alternative flowchart of the method of transferring network information from a first device in the network to a second configured device in the same network. The method of transferring network information includes the steps of sending from the first device, wherein the first device is unconfigured, a request on the network for IP configuration information (step 210); wherein a second device configured for the network, responsive to the request on the network for IP configuration information, responds with at least a portion of its IP configuration information (step 220); and using the at least a portion of the IP configuration information of the second device, creating IP configuration information for the first device (230). Compared to the embodiment shown in Figure 2A, the flowchart shown in Figure 2B includes the additional step of sending a request from the first device for configuration information. For the embodiment described and shown in Figure 2B, the step of sending out the configuration information of the second device, is only done in response to a request by the first device.

In the described embodiments, the first device is unconfigured and connected to the network. By unconfigured, we mean that the device on the network is not recognized by the other devices on the network. Typically, this would mean that the device does not have an assigned IP address. A device typically does not have an assigned IP address when it has been recently added to the network.

In the described configuration, the first device 110 which contains the “friend” configuration features identifies that it is unconfigured and broadcasts a

unique “unconfigured” multicast packet to the other devices on the relevant network. For an unconfigured first device 110, the first device 110 sends out a request for IP configuration information, and a second device 120 responds with at least a portion of its IP configuration information. A second device 120 that is configured for the network and connected to the network is capable of understanding a request of the first device for network information. When configuration of the first device is required, the second device will send out a portion of its IP configuration information. In the preferred embodiment, the first and second device are on the same subnet.

The format for transferring network information between devices on the network can be achieved using a variety of formats and protocols. For example, the request for information from the first device or the response from the second device could be sent in a flexible hierarchical format. Similarly data could be sent in a number of predefined formats including text. Further, under one embodiment of the present configuration and method, the two devices would not be required to understand all of the information transferred in a data transfer. For example, in one embodiment IP configuration data might include the data transfer of the address of a SYSLOG server that is not needed for operation of the device that the network information was transferred to. Further, in one embodiment data transferred between devices might be encrypted to prevent unwanted sharing between devices on the network.

Figure 3 shows an example of network information that is broadcast from a configured device on a TCP/IP network broadcast over a network to an

unconfigured device. Although an illustrative format for network information is shown, other formats representative of different networks or protocols may also be used in combination with the present invention. For example, the described method and configuration could be used on network having the IPv4, IPv6,
5 Novell, Appletalk, or DLL/LCC protocols.

Referring to block 310 shows the type of network information that would be broadcast from the second configured device in step 220. The network information includes an IP address (IP=15.29.33.12), a subnet mask (sm=255.255.0.0), a default gateway (dg=15.29.33.1), a SYSLOG server (sl=14.29.33.2) and AppParm1 and AppParm2 parameters (AppParm2=1, AppParm1=2).

In order to create IP configuration information for the first device, the second device typically broadcasts at least the minimum information required to configure the first IP device. The second device is not required to send all of its IP configuration information (it sends at least a portion of its IP configuration information), but typically sends the minimum information required to configure the first device. In one embodiment, the minimum information required to
20 configure the first device is the IP address and its subnet mask of the second configured device. Thus, for this example, the second device would broadcast respond with an IP address (IP=15.29.33.12), a subnet mask (sm=255.255.0.0). In an alternative embodiment, the second device might broadcast or alternatively respond to the first device's request for IP configuration information with a
25 response that includes network information other than the minimum information

required to configure the first device. For example, the second device may respond to the first device's request with its IP address, its subnet mask, a default gateway IP address for the network, and SYSLOG server IP address. In this example, the second configured device then would broadcast an IP address
5 (IP=15.29.33.12), a subnet mask (sm=255.255.0.0), a default gateway (dg=15.29.33.1), a SYSLOG server (sl=14.29.33.2) .

In one embodiment, after the broadcast of network information has been received from the second device, it is evaluated to determine whether the broadcast of the second device will be accepted and used to create IP
10 configuration information for the first device. The first device may choose not to accept a broadcast from a device that is not compatible or does not work optimally with it.

After determination is made whether to accept data from the device
15 broadcasting the information, the first device determines which information received from the second device it can use to configure itself. As previously stated, in one embodiment, the second device might respond to the first device's request with its IP address, its subnet mask, a default gateway IP address for the network, and SYSLOG server IP address. However, the first device might
20 determine that it needs only the IP address and subnet mask of the second device to configure itself.

Unlike other conventional processes, where the server assigns an IP address to an unconfigured device or a default IP address is assigned, in the present

invention the IP address of an unconfigured device is created using the IP address of a device on the network that is already configured. This device may be a server, but there is certainly no requirement that the device be a server.

In one embodiment, the steps of using at least a portion of the IP configuration information of the second device to create IP configuration information for the first device includes the steps of: combining the IP address of the second device with the subnet mask of the second device to get an IP device characteristic of the network but independent of the device (step 410); creating a device address portion for the IP address of the first device (step 420); and combining the IP address that is characteristic of the network but independent of the device with the device address portion of the IP address for the first device (430). The order of steps 410 and 420 is not critical, however, both steps must be performed before step 430.

The step of combining the IP address of the second device with the subnet mask of the second device to get an IP device characteristic of the network but independent of the device (step 410) gives a result that will be used to create an IP address portion for the first device that is consistent with other devices in the network environment. Referring to block 320 of Figure 3, the bolded portion of the IP address 15.29 is the portion of the IP address that is characteristic of the network but independent of the device. Referring to block 330 of Figure 3, shows an IP address 15.29.99.98. The portion of the address that is in bold (99.98) is the device address portion of the IP address that was created for the first unconfigured device. The device address portion for the IP address for the first unconfigured

device should have the same number of bits as the device address portion of the IP address for other devices on the network.

The device address portion for the IP address of the first device could be created in a number of ways. For example, the device address portion of the first device could be created iteratively or using a hash algorithm or other type of algorithm, to create a random address. In the preferred embodiment, the device address portion for the IP address of the first device is unique.

After steps 410 and 420, the IP address that is characteristic of the network but independent of the device is combined with the device address portion of the IP address for the first device (430) to create an IP address for the first device. Referring to block 330, the newly created IP address is 15.29.99.98, a combination of the device address portion of the IP address and the portion of the IP address that is characteristic of the network but independent of the device.

Typically, the first device will perform a test by attempting to contact the IP address that was created for the first device. If there is no response to the test then it is assumed that the IP address that was created for the first device is not in use. This IP address will then be considered assigned to the first device. In one embodiment, after the test is performed and no device responds, the first device would send out information to the network to announce that the first device is available for use and is claiming its new network IP address. This announcement is broadcast to the subnet, for example using an Internet Control Message Protocol Ping. The announcement is recognized and is typically stored by the nearest router on the subnet.

In the case where the test is performed and an answer is received from a device on the network, a new device address portion of the first device is generated (step 420). The newly generated device address portion of the first device is then combined with the IP address that is characteristic of the network but independent of the device (step 430). The test to determine whether another device on the network has the created IP address is then performed again. This process is repeated until a unique IP address for the first device is created.

After the first device is configured, the first device may (1) use other network information passed to it in the response from the second configured device or (2) request additional network information. For example, in one embodiment SYSLOG information may be passed from a device on the network to the first device. The other network information, in this case SYSLOG information may be passed to the first device with the requested IP configuration. Alternatively, the other network information may be passed to the first device after it has been configured in a separate request for information.

The foregoing discussion discloses and describes merely exemplary methods and embodiments of the present invention. As will be understood by those familiar with the art, the invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. Accordingly the disclosure of the present invention is intended to be illustrative, but not limiting of the scope of the invention, which is set forth in the following claims.

WHAT IS CLAIMED IS:

- 1 1. A network configuration comprising:
 - 2 a first device that is unconfigured and connected to the network; and
 - 3 a second device that is configured and connected to the network, wherein
 - 4 the second device sends over the network at least a portion of its configuration
 - 5 information,
 - 6 wherein the at least a portion of the configuration information of the second
 - 7 device is used to create configuration information for the first device.
- 8 2. The network configuration recited in claim 1 wherein the first device modifies
- 9 the configuration information of the second device to create configuration
- 10 information for itself.
- 11 3. The network configuration recited in claim 1 wherein the first device is capable
- 12 of sending over the network a request for configuration information.
- 13 4. The network configuration recited in claim 2 wherein the second device sends
- 14 its configuration information in response to the request for configuration
- 15 information from the first device.
- 16 5. The network configuration recited in claim 1 wherein the configuration
- 17 information for the first device is address configuration information.
- 18 6. The network recited in claim 1 wherein the configuration information created
- 19 for the first device is the IP address of the first device.

1 7. The network recited in claim 1 wherein the second device is not required to be
2 a server.

3 8. The network recited in claim 1 wherein the configuration information create for
4 the first device is created by the first device modifying the at least a portion of the
5 configuration information of the second device.

6 9. A computer-implemented method of transferring network information,
7 including configuration information, between at least a first and second device
8 connected to the network, including the steps of:

9 sending from the second device that is connected to and configured for the
10 network at least a portion of its configuration information; and

11 using the at least a portion of the configuration information sent from the
12 second device to create configuration information for the first device, wherein the
13 first device is connected to the network and initially unconfigured.

14 10. The method recited in claim 9 further including the step of sending from the
15 first device a request on the network for configuration information.

16 11. The method recited in claim 10 wherein the second device responds to the
17 request from the first device for configuration information with at least a portion
18 of its configuration information.

19 12. The method recited in claim 9 further including the step of determining
20 whether to accept the at least of portion of the configuration information from the
21 second device.

1 13. The method recited in claim 9 further including the step of determining
2 whether configuration address information was received from a compatible device.

3 14. The method recited in claim 9 further including the step of generating a
4 subnet mask from the at least a portion of configuration information of the second
5 device.

6 15. The method recited in claim 9 wherein after the first device is configured, the
7 second device may respond to the first device with network information other than
8 configuration information.

9 16. The method recited in claim 9 wherein the second device responds both with
10 at least a portion of its configuration information and other network information.

11 17. The method recited in claim 9 further including the step of the second device
12 responding with the network information other than configuration information.

13 18. The method recited in claim 15 wherein the other network information is
14 SYSLOG information.

15 19. The method recited in claim 9 further including the step of communicating
16 with second device or other devices on the network that the first device that was
17 previously unconfigured is now configured and available for use.

18 20. The method recited in claim 9 wherein the configuration information of the
19 second device is used to create an IP address for the first device.

21. The method recited in claim 18 further including the step of confirming that the IP address created for the first device is not currently in use.

22. The method recited in claim 9 wherein the step of creating information for the first device includes the step of combining a portion of a configuration address information from the second device with a device portion address of the first device.

23. The method recited in claim 20 wherein the device portion address of the first device is generated using a hash algorithm.

24. A network configuration comprising:

a first device that is unconfigured and connected to the network, the first device being capable of sending over the network a request for configuration information; and

a second device that is configured and connected to the network, wherein responsive to the request for configuration information from the first device, the second device responds with at least a portion of its configuration information,

wherein the at least a portion of the configuration information of the second device is used to create configuration information for the first device.


25. A computer-implemented method of transferring network information, including configuration information, between at least a first and second device connected to the network, including the steps of:

sending from the first device, wherein the first device is unconfigured, a request on the network for configuration information;

1 wherein a second device configured for the network, responsive to the
2 request on the network for configuration information, responds with at least a
3 portion of its configuration information; and
4 using the at least a portion of the configuration information of the second
5 device, to create configuration information for the first device.

1 The present invention provides a network configuration and method where a first
2 device that is unconfigured and connected to the network sends over the network
3 a request for IP configuration information. Responsive to the request for IP
4 configuration information from the first device, a second device that is configured
5 for and connected to the network, responds with at least a portion of its IP
6 configuration information. The at least a portion of the IP configuration of the
7 second device is used to create IP configuration information for the first device.

FIGURE 1

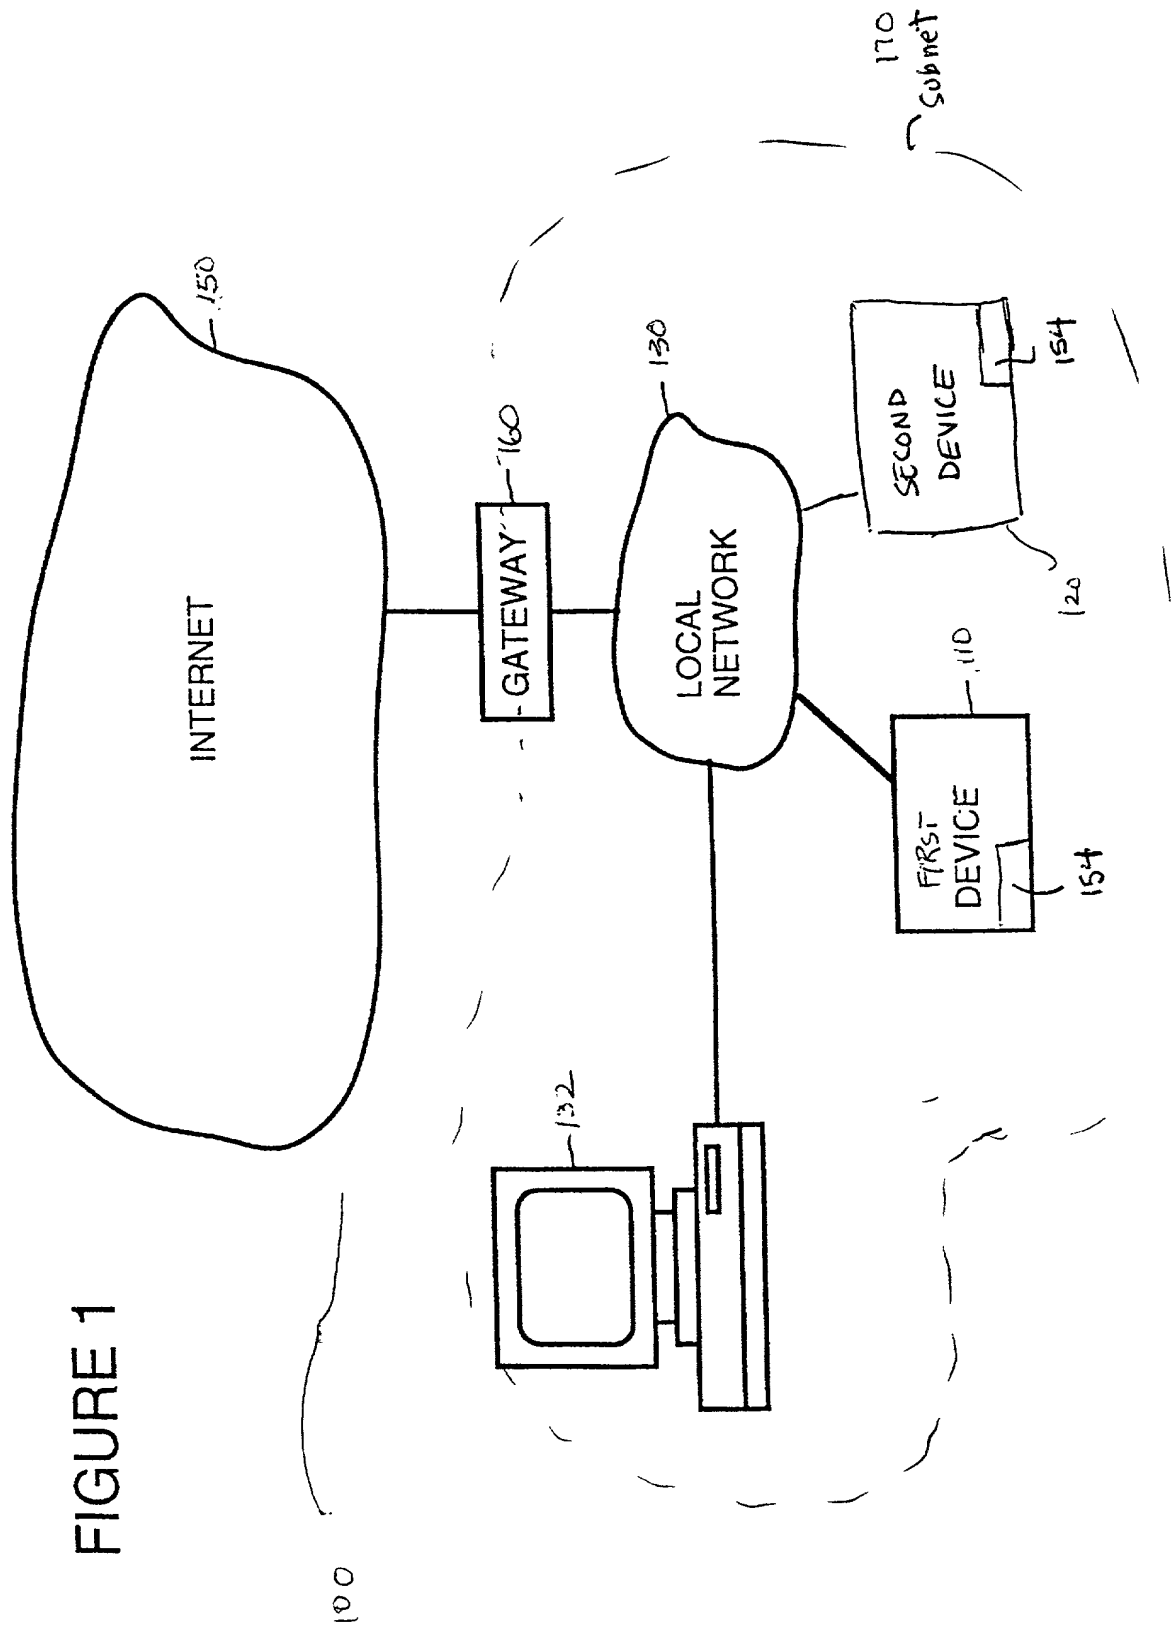

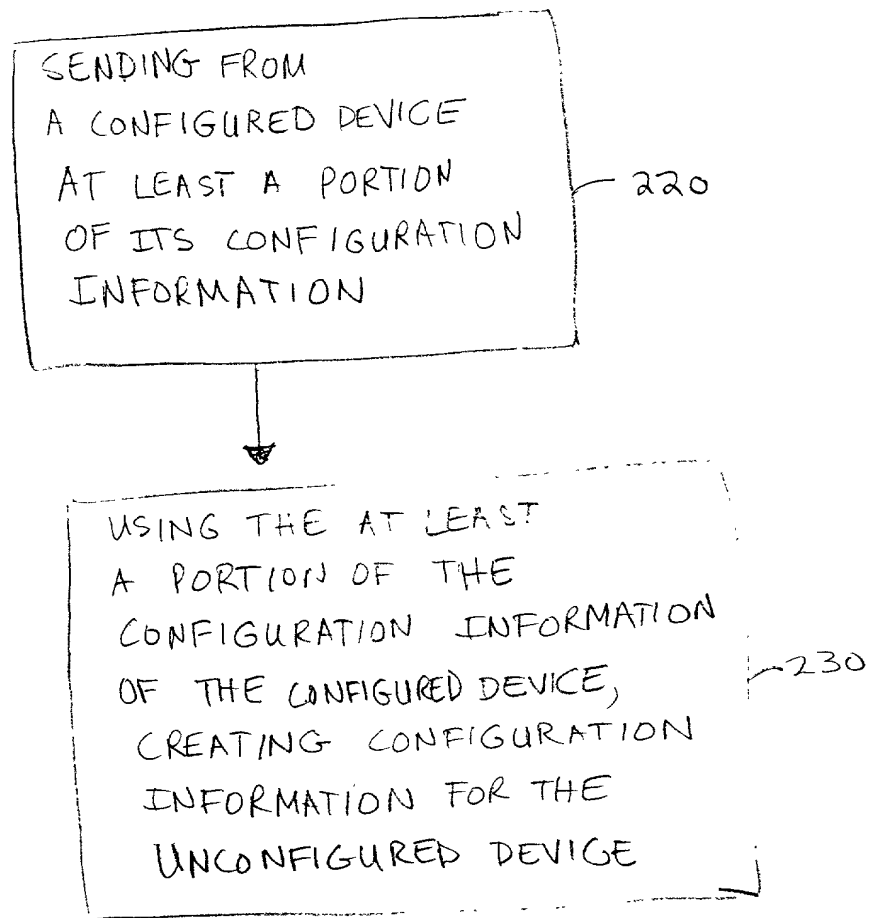


FIGURE 2A

05703388 103100


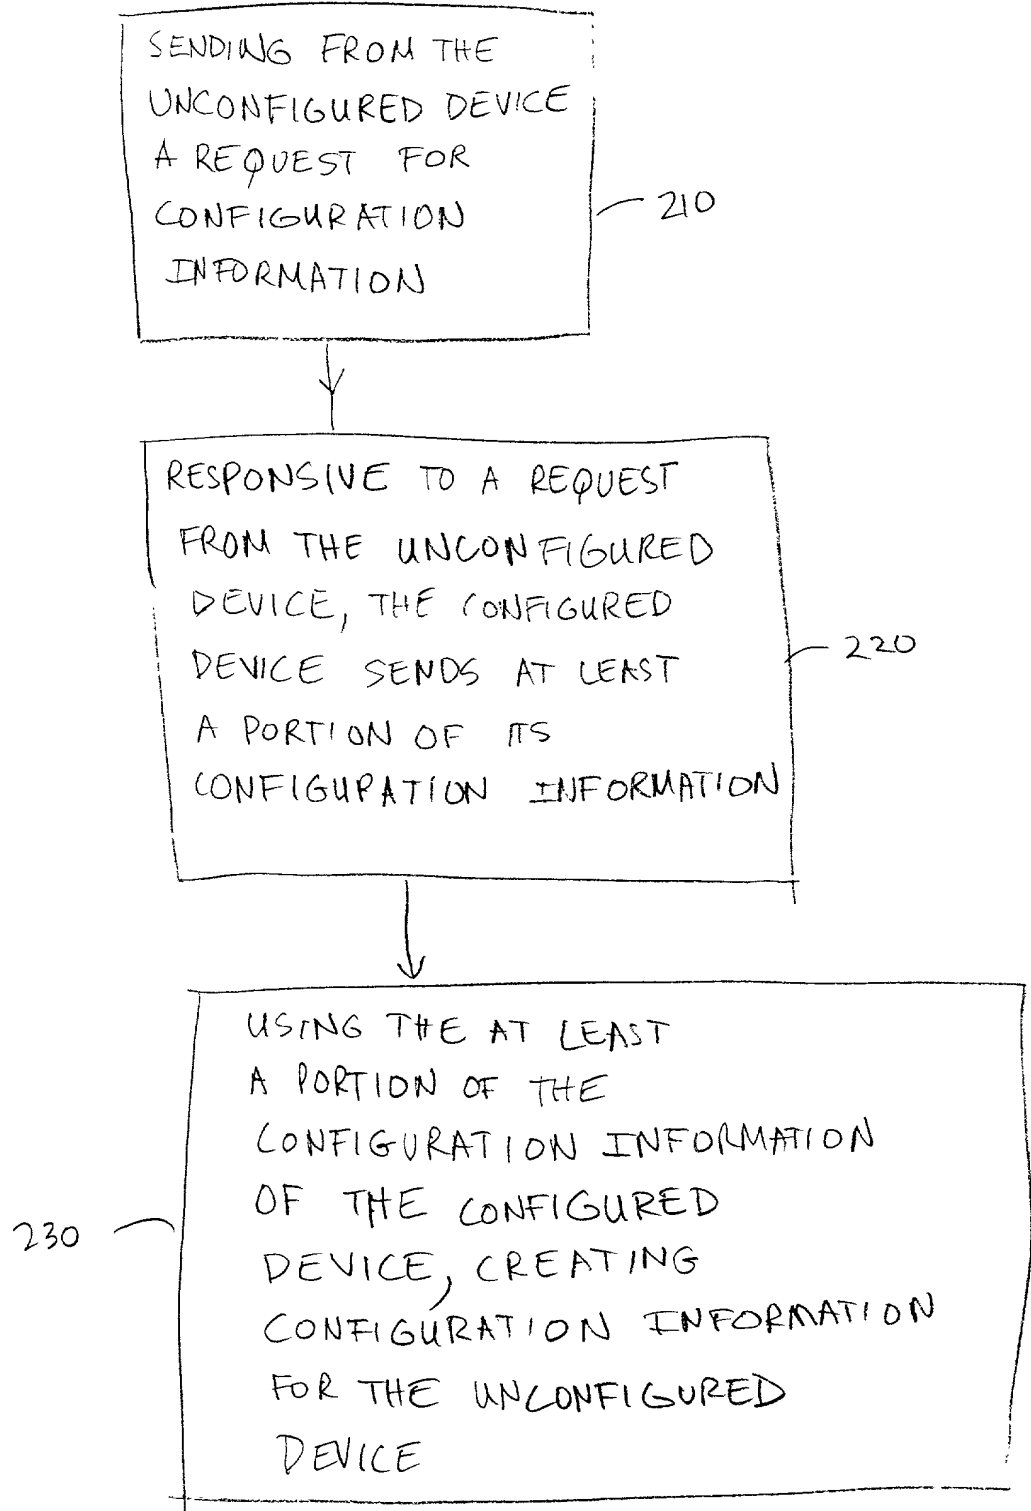


FIGURE 2B

FIGURE 3

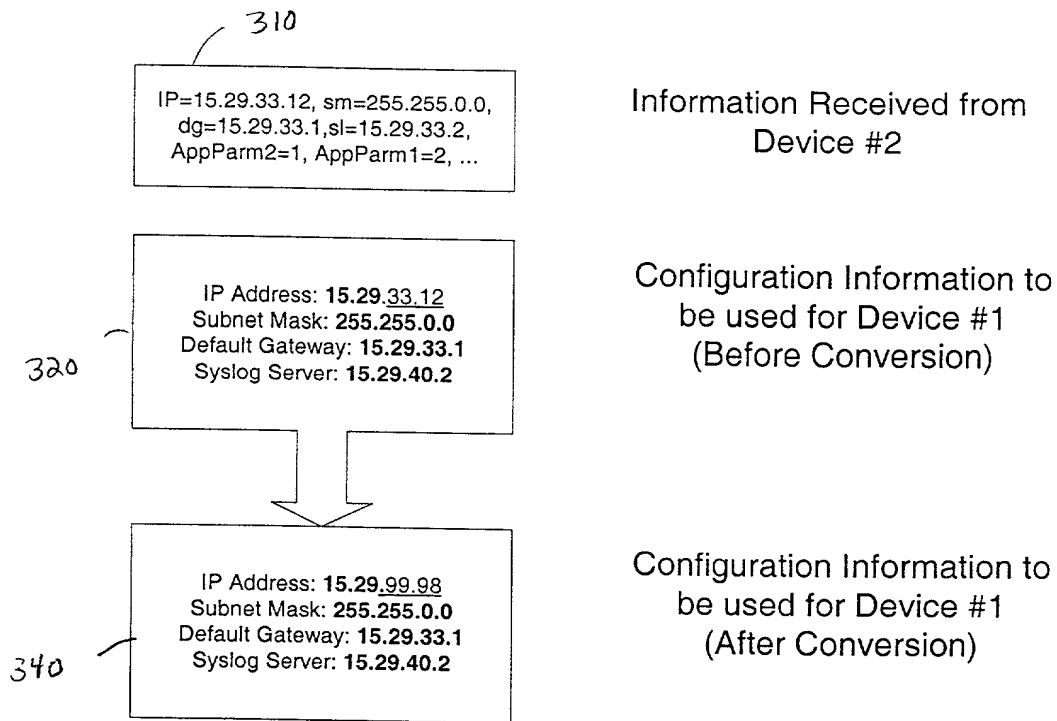

COMBINING THE IP ADDRESS
OF THE SECOND DEVICE WITH
THE SUBNET MASK OF THE
SECOND DEVICE TO GET
IP DEVICE INFORMATION
CHARACTERISTIC OF THE NETWORK
BUT INDEPENDENT OF
THE DEVICE

410



CREATING A DEVICE
ADDRESS PORTION FOR
THE IP ADDRESS OF
THE FIRST DEVICE

420



COMBINING THE IP ADDRESS THAT IS CHARACTERISTIC OF THE NETWORK BUT INDEPENDENT OF THE DEVICE WITH THE DEVICE ADDRESS PORTION OF THE IP ADDRESS FOR THE FIRST DEVICE

-430

FIGURE 4

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONATTORNEY DOCKET NO. 10002571-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Friend Configuration And Method For Network Devices

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U S C 119
			YES _____ NO _____
			YES _____ NO _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number **022879**Place Customer
Number Bar Code
Label hereSend Correspondence to:
HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80527-2400

Direct Telephone Calls To:

Denise A. Lee
(408) 447-6153

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: **Douglas W. Arens** Citizenship: **US**Residence: **369 Farmington Circle Roseville, CA 95678**Post Office Address: **Same as Residence**

Inventor's Signature _____

Date _____